

WTZ7L-BP 12Volt 7Ah

Specifications

Nominal Voltage(V) **12V**

Nominal Capacity

10 hour rate	(0.7A	to	10.50V)	7Ah
5 hour rate	(1.19A	to	10.20V)	5.95Ah
1 C	(7A	to	9.60V)	3.15Ah
3 C	(21A	to	9.60V)	2.45Ah

Weight **Approx. 2.53kg(5.57Lbs.)**

Internal Resistance (at 1KHz) **Approx. 13 mΩ**

Cold Cranking Amperes (-17.8) **100A**

High rate discharge characteristics (-10)
Discharge current (A) **50A**

Duration (min) **1.7min**

5 second voltage (V) **9.7V**

Operating Temperature Range


Charge	-15 (5)	to	40 (104)
Discharge	-15 (5)	to	50 (122)
Storage	-15 (5)	to	40 (104)

Charge Retention (shelf life) at 20 (68)

1 month	92%
3 month	90%
6 month	80%



Case Material **PP**

Terminal Shape

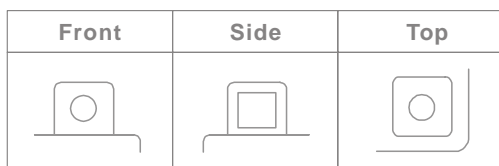


Dimensions

mm(inch)

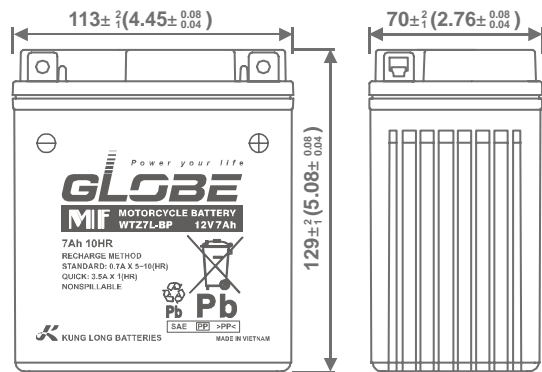

(v) FOR 12V BATTERY Discharge Time VS. Discharge Current (25)

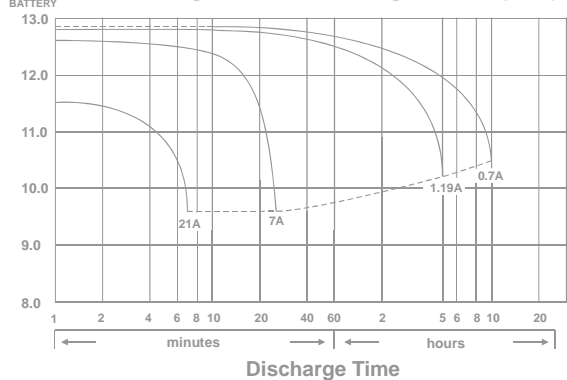

301215-1D-V